
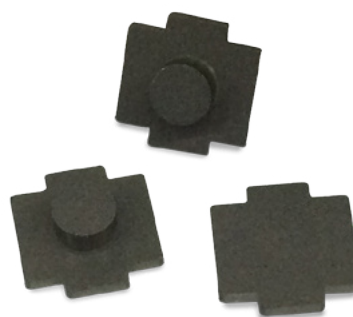

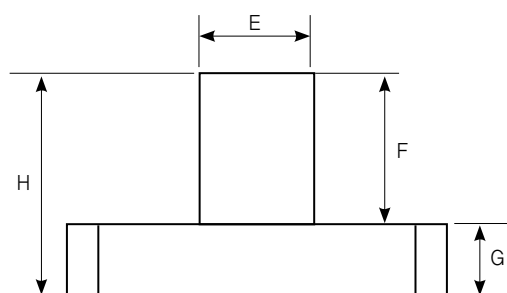


T-type


Appearance Specification

Ex) T6020

Item	A	B	C	D	E	F	G	H
STD.	6.50	6.50	7.07	1.40	2.30	0.35	0.35	0.70
TOL.	±0.1	±0.1	±0.1	±0.05	±0.1	±0.05	±0.05	±0.05

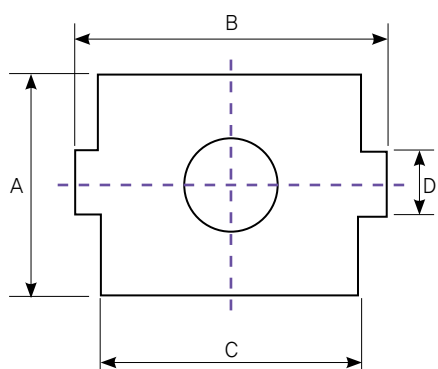

SMD Core Line Up

Type	Model	Size (mm)			Inductance (L)	Permeability (ui)	Application
		Outside Diameter(A)	Inside Diameter(E)	Height (D)			
 T-type	T3015	4.0(±0.1)	4.0(±0.1)	4.0(±0.05)	0.12 ~ 10.0	50	Mobile, Tablet
	T6020	4.8(±0.1)	4.8(±0.1)	4.0(±0.05)	0.12 ~ 10.0	50	Server, Portable Device
	T6526	6.2(±0.1)	6.2(±0.1)	4.0(±0.05)	0.12 ~ 10.0	50	Server, Portable Device
	T7525	6.2(±0.1)	6.2(±0.1)	4.0(±0.05)	0.12 ~ 10.0	50	Server, Portable Device